

FLOW PRODUCTS

Fittings - Barb Block

REINFORCED POLYPROPYLENE



Working pressure

Up to 14 BAR
(200 psi) at 20 °C




Temperature

4 °C - 90 °C
(subject to application)

Fittings' dimensions


↓ refer to tube ID or OD,
↑ with respect to the common application.

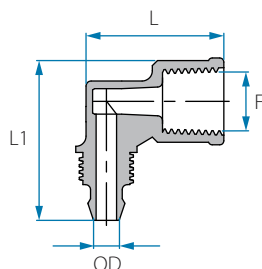

BSPT Female Elbow

Cat. No.	OD mm	F (BSPT)	L mm	L1 mm	Colour
22046046028	6	1/8"	25.1	273	Blue
22046046048	6	1/4"	270	273	
22046048048	8	1/4"	270	273	
22046046022	6	1/8"	25.1	273	Black
22046046042	6	1/4"	270	273	
22046048042	8	1/4"	270	273	

Note: Packing 25 unit

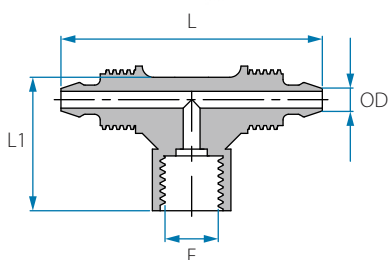

BSPT Female Branch T

Cat. No.	OD mm	F (BSPT)	L mm	L1 mm	Colour
22047346028	6	1/8"	46.6	25.0	Blue
22047348048	8	1/4"	46.8	272	

Cat. No.	OD inch	F (BSPT)	L mm	L1 mm	Colour
22047304028	1/4"	1/8"	46.6	25.0	Navy Blue
22047305048	5/16"	1/4"	46.8	272	

Note: Packing 25 unit

FLOW PRODUCTS

Fittings - Threaded Connectors


NYLON 6-6



Working pressure
Up to 14 BAR
(200 psi) at 20 °C



Temperature
-20 °C - 110 °C
(subject to application)

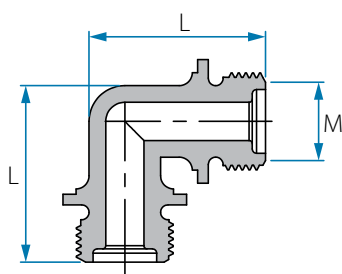

BSPT Threaded Elbow


Cat. No.	M (BSPT)	L mm	Colour
12016502008	1/8"	24.4	Blue
12016504008	1/4"	26.4	
12016506008	3/8"	31.8	
12016508008	1/2"	40.2	
12016502002	1/8"	24.4	Black
12016504001	1/4"	26.4	White
12016504002	1/4"	26.4	Black
12016504007	1/4"	26.4	Green

Note: Packing 25 unit

NPT Threaded Elbow

Cat. No.	M (NPT)	L mm	Colour
12026502003	1/8"	23.8	Grey
12026504003	1/4"	28.4	

Note: Packing 25 unit

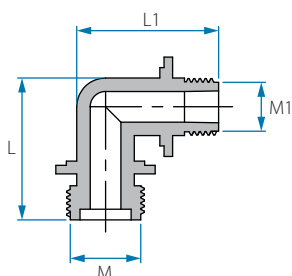

BSPT Reducing Threaded Elbow

Cat. No.	M (BSPT)	M1 (BSPT)	L mm	L1 mm	Colour
12016904028	1/4"	1/8"	26.4	24.4	Blue
12016906048	3/8"	1/4"	31.8	31.5	
12016908068	1/2"	3/8"	40.0	38.1	

Note: Packing 25 unit

NPT Reducing Threaded Elbow

Cat. No.	M (NPT)	M1 (NPT)	L mm	L1 mm	Colour
12026904023	1/4"	1/8"	28.4	24.0	Grey

Note: Packing 25 unit

FLOW PRODUCTS

Fittings - PVDF

PVDF




Working pressure
Up to 14 BAR
(200 psi) at 20 °C



Temperature
-20 °C - 120 °C
(subject to application)



Fittings' dimensions
refer to tube ID or OD, with respect to
the common application.

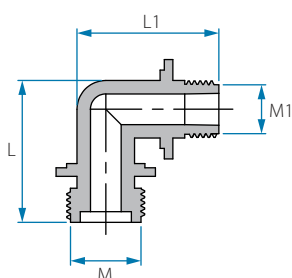

BSPT Reducing Threaded Elbow


Cat. No.	M (BSPT)	M1 (BSPT)	L mm	L1 mm	Colour
12056904021	1/4"	1/8"	26.4	24.4	○ White
12056906041	3/8"	1/4"	31.8	31.5	
12056908061	1/2"	3/8"	40.0	38.1	

Note: Packing 25 unit

NPT Reducing Threaded Elbow

Cat. No.	M (NPT)	M1 (NPT)	L mm	L1 mm	Colour
12066904021	1/4"	1/8"	28.4	24.0	○ White

Note: Packing 25 unit

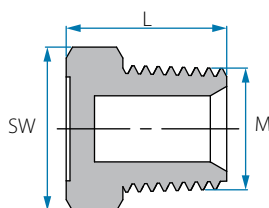

BSPT Hex Threaded Plug

Cat. No.	M (BSPT)	L mm	SW	Colour
12052102001	1/8"	13.6	12	○ White
12052104001	1/4"	16.6	15	
12052106001	3/8"	16.1	18	
12052108001	1/2"	19.6	22	
12052112001	3/4"	22.0	27	
12052116001	1"	27.0	36	

Note: Packing 25 unit

NPT Hex Threaded Plug

Cat. No.	M (NPT)	L mm	SW	Colour
12062102001	1/8"	14.7	11	○ White
12062104001	1/4"	19.4	14	
12062106001	3/8"	20.4	17	
12062108001	1/2"	25.6	22	
12062112001	3/4"	26.0	27	

Note: Packing 25 unit

FLOW PRODUCTS

Fittings - PVDF

PVDF




Working pressure
Up to 14 BAR
(200 psi) at 20 °C



Temperature
-20 °C - 120 °C
(subject to application)



Fittings' dimensions
refer to tube ID or OD, with respect to
the common application.

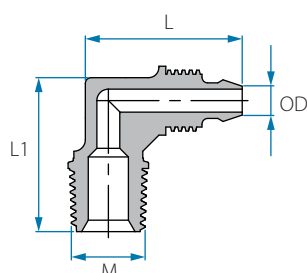

BSPT Male Elbow Barb Block Connector

Cat. No.	OD mm	M (BSPT)	L mm	L1 mm	Colour
22056946021	6	1/8"	27.6	22.4	White
22056946041	6	1/4"	27.6	26.8	
22056948021	8	1/8"	27.6	26.8	
22056948041	8	1/4"	27.6	26.8	
22056948061	8	3/8"	28.1	29.4	
22056952041	12	1/4"	40.3	31.7	
22056952061	12	3/8"	40.3	32.0	
22056952081	12	1/2"	40.3	36.0	

Cat. No.	OD inch	M (BSPT)	L mm	L1 mm	Colour
22056904021	1/4"	1/8"	22.4	27.6	White & Navy Blue
22056904041	1/4"	1/4"	26.8	27.6	
22056905021	5/16"	1/8"	26.8	27.6	
22056905041	5/16"	1/4"	26.8	27.6	
22056905061	5/16"	3/8"	29.4	28.1	
22056908041	1/2"	1/4"	31.7	40.3	
22056908061	1/2"	3/8"	32.0	40.3	
22056908081	1/2"	1/2"	36.0	40.3	

Note: Packing 25 unit


* Nuts material is Reinforced PP

NPT Male Elbow Barb Block Connector

Cat. No.	OD inch	M (NPT)	L mm	L1 mm	Colour
22256904021	1/4"	1/8"	24.0	27.5	White & Grey
22256904041	1/4"	1/4"	29.0	27.5	
22256905021	5/16"	1/8"	24.0	27.5	
22256905041	5/16"	1/4"	29.0	27.5	

Note: Packing 25 unit

* Nuts material is Reinforced PP

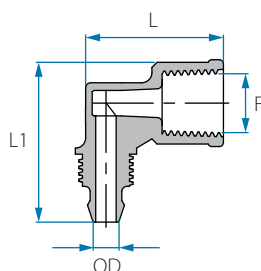

BSPT Female Elbow Barb Block Connector

Cat. No.	OD mm	F (BSPT)	L mm	L1 mm	Colour
22056046021	6	1/8"	25.1	27.3	White
22056046041	6	1/4"	27.0	27.3	
22056048041	8	1/4"	27.0	27.3	

Note: Packing 25 unit

* Nuts material is Reinforced PP

FLOW PRODUCTS

Fittings - PVDF

PVDF




Working pressure
Up to 14 BAR
(200 psi) at 20 °C



Temperature
-20 °C - 120 °C
(subject to application)




Fittings' dimensions
refer to tube ID or OD, with respect to
the common application.

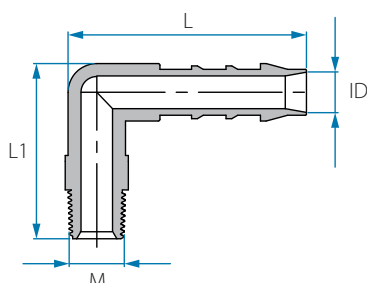

NPT Male Elbow Hose Connector

Cat. No.	ID inch	M (NPT)	L mm	L1 mm	Colour
12356902021	5/32"	1/8"	25.7	26.0	○ White
12356902041	5/32"	1/4"	25.9	31.1	
12356903021	3/16"	1/8"	31.8	28.6	
12356903041	3/16"	1/4"	33.5	31.8	
12356903081	3/16"	1/2"	40.1	31.8	
12356904021	1/4"	1/8"	35.4	29.0	
12356904041	1/4"	1/4"	35.5	33.7	
12356904061	1/4"	3/8"	35.5	33.8	
12356904081	1/4"	1/2"	40.0	35.4	
12356905021	5/16"	1/8"	41.5	32.1	
12356905041	5/16"	1/4"	41.2	36.7	
12356905061	5/16"	3/8"	41.5	36.6	
12356905081	5/16"	1/2"	41.5	43.1	
12356906041	3/8"	1/4"	45.4	37.7	
12356906061	3/8"	3/8"	45.3	37.5	
12356906081	3/8"	1/2"	45.4	44.4	
12356906121	3/8"	3/4"	45.4	44.0	
12356908041	1/2"	1/4"	48.6	39.0	
12356908061	1/2"	3/8"	48.3	28.6	
12356908081	1/2"	1/2"	48.7	45.2	
12356908121	1/2"	3/4"	48.7	45.2	
12356909061	9/16"	3/8"	51.4	42.2	
12356909081	9/16"	1/2"	51.4	48.6	
12356909121	9/16"	3/4"	51.5	48.5	
12356910081	5/8"	1/2"	53.8	51.5	
12356910121	5/8"	3/4"	53.8	51.4	
12356912081	3/4"	1/2"	56.6	52.8	
12356912121	3/4"	3/4"	56.2	53.0	

Note: Packing 25 unit

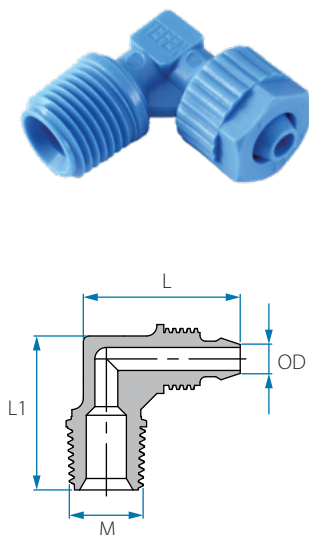

BSPT Male Elbow

Cat. No.	OD mm	M (BSPT)	L mm	L1 mm	Colour
22046946028	6	1/8"	27.6	22.4	Blue
22046946048	6	1/4"	27.6	26.8	
22046948028	8	1/8"	27.6	26.8	
22046948048	8	1/4"	27.6	26.8	
22046948068	8	3/8"	28.1	29.4	
22046952048	12	1/4"	40.3	31.7	
22046952068	12	3/8"	40.3	32.0	
22046952088	12	1/2"	40.3	36.0	
22046946022	6	1/8"	27.6	22.4	Black
22046948022	8	1/8"	27.6	26.8	


Cat. No.	OD inch	M (BSPT)	L mm	L1 mm	Colour
22046904028	1/4"	1/8"	27.6	22.4	Navy Blue
22046904048	1/4"	1/4"	27.6	26.8	
22046905028	5/16"	1/8"	27.6	26.8	
22046905048	5/16"	1/4"	27.6	26.8	
22046905068	5/16"	3/8"	28.1	29.4	
22046908048	1/2"	1/4"	40.3	31.7	
22046908068	1/2"	3/8"	40.3	32.0	
22046908088	1/2"	1/2"	40.3	36.0	
22046908082	1/2"	1/2"	40.3	36.0	Black
22046904041	1/4"	1/4"	26.7	26.8	White

Note: Packing 25 unit

NPT Male Elbow

Cat. No.	OD inch	M (NPT)	L mm	L1 mm	Colour
22246904023	1/4"	1/8"	27.5	24.0	Grey
22246904043	1/4"	1/4"	27.5	29.0	
22246905023	5/16"	1/8"	27.5	24.0	
22246905043	5/16"	1/4"	27.5	28.9	

Note: Packing 25 unit

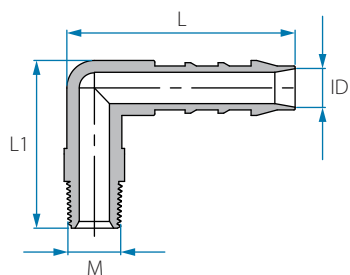

NPT Male Elbow Hose Connector

Cat. No.	ID inch	M (NPT)	L mm	L1 mm	Colour
12256902023	5/32"	1/8"	25.7	26.0	Grey
12256902043	5/32"	1/4"	25.9	31.1	
12256903023	3/16"	1/8"	31.8	28.6	
12256903043	3/16"	1/4"	33.4	31.8	
12256903083	3/16"	1/2"	41.8	31.8	
12256904023	1/4"	1/8"	35.4	29.0	
12256904043	1/4"	1/4"	35.5	33.7	
12256904063	1/4"	3/8"	35.5	33.8	
12256904083	1/4"	1/2"	42.2	35.5	
12256905023	5/16"	1/8"	41.5	32.1	
12256905043	5/16"	1/4"	41.2	36.7	
12256905063	5/16"	3/8"	41.5	36.6	
12256905083	5/16"	1/2"	41.5	43.1	
12256906043	3/8"	1/4"	45.4	37.7	
12256906063	3/8"	3/8"	45.3	37.5	
12256906083	3/8"	1/2"	45.4	44.4	
12256906123	3/8"	3/4"	45.4	44.0	
12256908043	1/2"	1/4"	48.6	39.0	
12256908063	1/2"	3/8"	48.3	28.6	
12256908083	1/2"	1/2"	48.7	45.2	
12256908123	1/2"	3/4"	48.7	45.2	
12256909063	9/16"	3/8"	51.4	42.2	
12256909083	9/16"	1/2"	51.4	48.6	
12256909123	9/16"	3/4"	51.5	48.5	
12256910083	5/8"	1/2"	53.8	51.5	
12256910123	5/8"	3/4"	53.8	51.4	
12256912083	3/4"	1/2"	56.6	52.8	
12256912123	3/4"	3/4"	56.2	53.0	

Note: Packing 25 unit

FLOW PRODUCTS

Fittings - Hose Fittings

NYLON 6-6




Working pressure
Up to 14 BAR
(200 psi) at 20 °C



Temperature
-20 °C - 110 °C
(subject to application)




Fittings' dimensions
refer to tube ID or OD, with respect to
the common application.

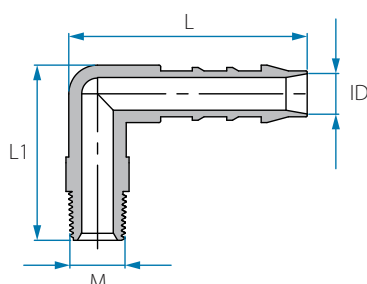

BSPT Male Elbow Hose Connector

Cat. No.	ID mm	M (BSPT)	L mm	L1 mm	Colour
12446944028	4	1/8"	26.7	24.1	Blue
12446944048	4	1/4"	26.7	27.2	
12446945028	5	1/8"	31.8	26.8	
12446945048	5	1/4"	32.0	29.8	
12446945088	5	1/2"	31.8	33.0	
12446946028	6	1/8"	35.5	27.3	
12446946048	6	1/4"	35.5	29.8	
12446946068	6	3/8"	35.5	30.0	
12446946088	6	1/2"	35.5	33.7	
12446948028	8	1/8"	41.5	30.4	
12446948048	8	1/4"	41.5	32.8	
12446948068	8	3/8"	41.5	32.8	
12446948088	8	1/2"	41.5	36.8	
12446950048	10	1/4"	45.5	33.9	
12446950068	10	3/8"	45.5	34.1	
12446950088	10	1/2"	45.5	37.8	
12446950128	10	3/4"	45.5	38.9	
12446952048	12	1/4"	48.7	35.0	
12446952068	12	3/8"	48.7	35.3	
12446952088	12	1/2"	48.7	39.0	
12446952128	12	3/4"	48.7	39.7	
12446954068	14	3/8"	51.4	38.5	Blue
12446954088	14	1/2"	51.4	42.3	
12446954128	14	3/4"	51.4	43.3	
12446956088	16	1/2"	53.7	44.9	
12446956128	16	3/4"	53.7	46.0	
12446959088	19	1/2"	56.0	46.4	
12446959128	19	3/4"	56.4	47.5	

Note: Packing 25 unit

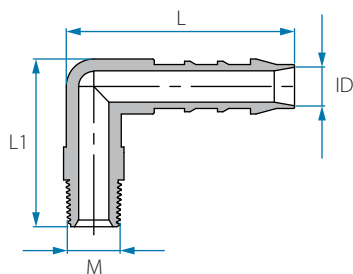

BSPT Male Elbow Hose Connector

Cat. No.	ID mm	M (BSPT)	L mm	L1 mm	Colour
12556944021	4	1/8"	26.7	24.1	○ White
12556944041	4	1/4"	26.7	27.2	
12556945021	5	1/8"	31.8	26.8	
12556945041	5	1/4"	29.8	32.0	
12556945081	5	1/2"	31.8	33.0	
12556946021	6	1/8"	35.5	27.3	
12556946041	6	1/4"	35.5	29.8	
12556946061	6	3/8"	35.5	30.0	
12556946081	6	1/2"	35.5	33.7	
12556948021	8	1/8"	41.5	30.4	
12556948041	8	1/4"	41.5	32.8	
12556948061	8	3/8"	41.5	32.8	
12556948081	8	1/2"	41.5	36.8	
12556950041	10	1/4"	45.5	33.9	
12556950061	10	3/8"	45.5	34.1	
12556950081	10	1/2"	45.5	37.8	
12556950121	10	3/4"	45.5	38.9	
12556952041	12	1/4"	48.7	35.0	
12556952061	12	3/8"	48.7	35.3	
12556952081	12	1/2"	48.7	39.0	
12556952121	12	3/4"	48.7	39.7	
12556954061	14	3/8"	51.4	38.5	
12556954081	14	1/2"	51.4	42.3	
12556954121	14	3/4"	51.4	43.3	
12556956081	16	1/2"	53.7	44.9	
12556956121	16	3/4"	53.7	46.0	
12556959081	19	1/2"	56.0	46.4	
12556959121	19	3/4"	56.4	47.5	

Note: Packing 25 unit

FLOW PRODUCTS

Fittings - Barb Connectors

POLYPROPYLENE




Working pressure
Up to 14 BAR
(200 psi) at 20 °C



Temperature
4 °C - 90 °C
(subject to application)

Fittings' dimensions
↓ refer to tube ID or OD, with respect
↑ to the common application.

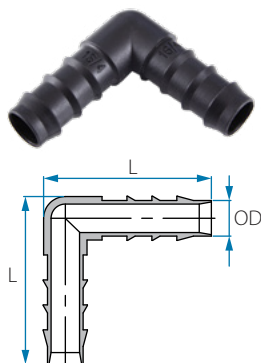


Union Elbow Hose Connector

Cat. No.	OD mm	L mm	Colour
12456512002	12	48.2	Black
12456516002	16	49.6	
12456520002	20	56.8	
12456525002	25	58.8	
*12466516003	16	40.5	Brown
*12466517003	17	45.1	

Note: Packing 25 unit

* Sharp barb (material: Acetal)

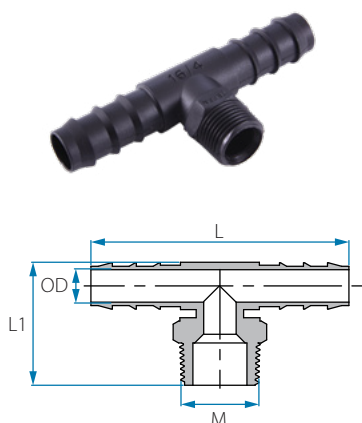


Male Branch T Hose Connector

Cat. No.	OD mm	M (BSPT)	L mm	L1 mm	Colour
12457112042	12	1/4"	84.7	34.1	Black
12457112062	12	3/8"	84.9	34.3	
12457112082	12	1/2"	84.9	38.4	
12457112122	12	3/4"	84.8	38.9	
12457116062	16	3/8"	86.2	36.3	
12457116082	16	1/2"	86.2	40.0	
12457116122	16	3/4"	86.2	41.0	
12457120082	20	1/2"	93.7	45.5	
12457120122	20	3/4"	93.7	46.6	
12457125082	25	1/2"	93.7	47.6	
12457125122	25	3/4"	93.8	48.6	Brown
*12467117083	17	1/2"	74.3	41.9	
*12467117123	17	3/4"	74.3	43.0	

Note: Packing 25 unit

* Sharp barb (material: Acetal)

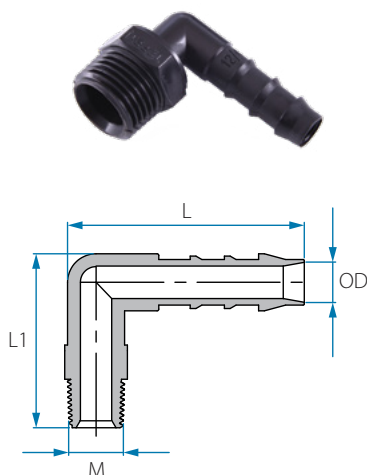

BSPT Male Elbow Hose Connector

Cat. No.	OD mm	M (BSPT)	L mm	L1 mm	Colour
12456912042	12	1/4"	48.4	34.0	Black
12456912062	12	3/8"	48.4	34.7	
12456912082	12	1/2"	48.4	38.0	
12456912122	12	3/4"	48.5	39.4	
12456916062	16	3/8"	51.1	36.2	
12456916082	16	1/2"	51.6	39.5	
12456916122	16	3/4"	51.1	41.0	
12456920082	20	1/2"	56.3	45.0	
12456920122	20	3/4"	56.0	46.8	
12456925082	25	1/2"	58.3	47.2	
12456925122	25	3/4"	58.7	48.5	Brown
*12466917083	17	1/2"	45.5	41.9	
*12466917123	17	3/4"	45.7	43.1	

Note: Packing 25 unit

* Sharp barb (material: Acetal)

FLOW PRODUCTS

Fittings - Hose Fittings

NYLON 6-6




Working pressure
Up to 14 BAR
(200 psi) at 20 °C



Temperature
-20 °C - 110 °C
(subject to application)



Fittings' dimensions
refer to tube ID or OD, with respect to
the common application.

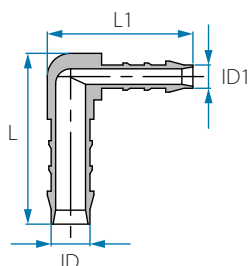


Reducing Elbow Hose Connector

Cat. No.	ID mm	ID1 mm	L mm	L1 mm	Colour
12446645448	5	4	31.8	27.8	Blue
12446646448	6	4	35.5	29.0	
12446646458	6	5	35.4	34.1	
12446648468	8	6	41.6	39.3	
12446650468	10	6	45.3	40.1	
12446650488	10	8	42.1	45.2	
12446652508	12	10	48.7	45.6	
12446654528	14	12	51.5	49.6	
12446656548	16	14	53.8	53.6	
12446659568	19	16	56.2	56.1	

Cat. No.	ID inch	ID1 inch	L mm	L1 mm	Colour
12256603023	3/16"	5/32"	31.8	27.9	Grey
12256604033	1/4"	3/16"	35.4	34.1	
12256605043	5/16"	1/4"	39.4	41.6	
12256606043	3/8"	1/4"	40.2	45.3	
12256606053	3/8"	5/16"	42.5	45.5	
12256608063	1/2"	3/8"	45.8	48.6	
12256609083	9/16"	1/2"	49.8	51.1	
12256610093	5/8"	9/16"	53.6	53.6	
12256612103	3/4"	5/8"	55.8	55.8	

Note: Packing 25 unit

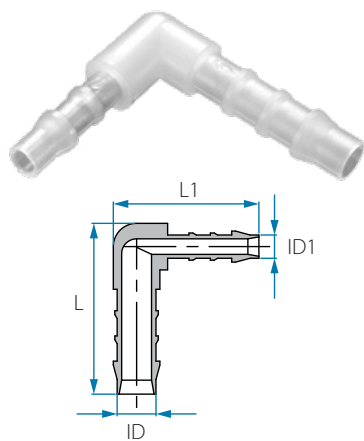


Reducing Elbow Hose Connector

Cat. No.	ID mm	ID1 mm	L mm	L1 mm	Colour
12556645441	5	4	31.8	27.8	○ White
12556646441	6	4	35.5	29.0	
12556646451	6	5	35.4	34.1	
12556648461	8	6	41.6	39.3	
12556650461	10	6	45.3	40.1	
12556650481	10	8	42.1	45.2	
12556652501	12	10	48.7	45.6	
12556654521	14	12	51.5	49.6	
12556656541	16	14	53.8	53.6	
12556659561	19	16	56.2	56.1	

Cat. No.	ID inch	ID1 inch	L mm	L1 mm	Colour
12356603021	3/16"	5/32"	31.8	27.9	○ White
12356604031	1/4"	3/16"	35.5	34.0	
12356605041	5/16"	1/4"	41.6	39.4	
12356606041	3/8"	1/4"	45.3	40.2	
12356606051	3/8"	5/16"	45.5	42.5	
12356608061	1/2"	3/8"	48.6	45.8	
12356609081	9/16"	1/2"	51.1	49.8	
12356610091	5/8"	9/16"	53.6	53.6	
12356612101	3/4"	5/8"	55.8	55.8	

Note: Packing 25 unit

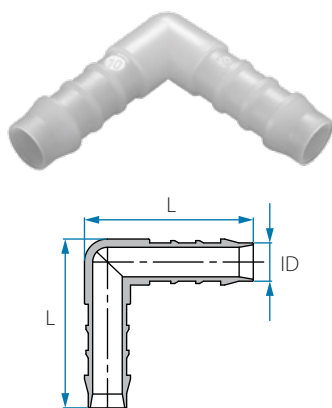

Union Elbow Hose Connector

Cat. No.	ID mm	L mm	Colour
12556544001	4	26.3	○ White
12556545001	5	31.7	
12556546001	6	35.5	
12556548001	8	41.4	
12556550001	10	44.6	
12556552001	12	46.3	
12556554001	14	51.0	
12556556001	16	53.9	
12556559001	19	55.8	

Cat. No.	ID inch	L mm	Colour
12356502001	5/32"	25.6	○ White
12356503001	3/16"	33.2	
12356504001	1/4"	36.1	
12356505001	5/16"	41.4	
12356506001	3/8"	44.6	
12356508001	1/2"	47.6	
12356509001	9/16"	51.2	
12356510001	5/8"	54.3	
12356512001	3/4"	56.7	

Note: Packing 25 unit



Union Elbow

Cat. No.	Tube OD mm	Colour
22006544002	4	● Black
22006546002	6	
22006548002	8	
22006550002	10	
22006552002	12	

Cat. No.	Tube OD inch	Colour
22006503002	3/16"	● Black
22006504002	1/4"	
22006505002	5/16"	
22006506002	3/8"	
22006508002	1/2"	

Note: Packing 25 unit
* Minimum order 500 pcs




Male Elbow

Cat. No.	Tube OD mm	M (BSPT)	Colour
22006944022	4	1/8"	● Black
22006944042	4	1/4"	
22006946022	6	1/8"	
22006946042	6	1/4"	
22006948022	8	1/8"	
22006948042	8	1/4"	
22006950042	10	1/4"	
22006950062	10	3/8"	
22006952062	12	3/8"	
22006952082	12	1/2"	

Cat. No.	Tube OD inch	M (BSPT)	Colour
22006903022	3/16"	1/8"	● Black
22006903042	3/16"	1/4"	
22006904022	1/4"	1/8"	
22006904042	1/4"	1/4"	
22006905022	5/16"	1/8"	
22006905042	5/16"	1/4"	
22006906042	3/8"	1/4"	
22006906062	3/8"	3/8"	
22006908062	1/2"	3/8"	
22006908082	1/2"	1/2"	

Note: Packing 25 unit
* Minimum order 500 pcs

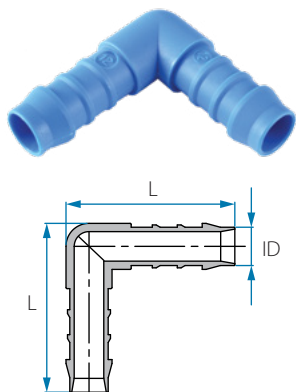


Union Elbow Hose Connector

Cat. No.	ID mm	L mm	Colour
12446544008	4	26.3	Blue
12446545008	5	31.7	
12446546008	6	35.5	
12446548008	8	41.4	
12446550008	10	44.6	
12446552008	12	46.3	
12446554008	14	51.0	
12446556008	16	53.9	
12446559008	19	55.8	

Cat. No.	ID inch	L mm	Colour
12256502003	5/32"	25.6	Grey
12256503003	3/16"	33.2	
12256504003	1/4"	36.1	
12256505003	5/16"	41.4	
12256506003	3/8"	44.6	
12256508003	1/2"	47.6	
12256509003	9/16"	51.2	
12256510003	5/8"	54.3	
12256512003	3/4"	56.7	

Note: Packing 25 unit

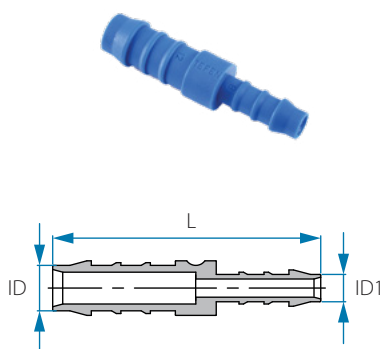

Reducing Hose Connector

Cat. No.	ID mm	ID1 mm	L mm	Colour
12445645448	5	4	42.2	Blue
12445646448	6	4	45.7	
12445646458	6	5	50.6	
12445648458	8	5	54.4	
12445648468	8	6	56.3	
12445650468	10	6	58.9	
12445650488	10	8	62.0	
12445652488	12	8	63.8	
12445652508	12	10	65.3	
12445654508	14	10	69.1	
12445654528	14	12	69.9	
12445656528	16	12	70.3	
12445656548	16	14	71.7	
12445659548	19	14	72.7	
12445659568	19	16	73.2	

Note: Packing 25 unit

FLOW PRODUCTS

Fittings - Barb Block

REINFORCED POLYPROPYLENE



Working pressure

Up to 14 BAR
(200 psi) at 20 °C




Temperature

4 °C - 90 °C
(subject to application)

Fittings' dimensions

↓ refer to tube ID or OD,
↑ with respect to the common application.

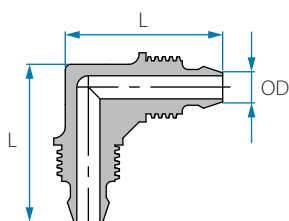

Union Elbow


Cat. No.	OD mm	L mm	Colour
22046546008	6	27.4	Blue
22046548008	8	27.4	
22046552008	12	40.5	
22046548002	8	27.4	Black

Cat. No.	OD inch	L mm	Colour
22046504008	1/4"	27.4	Navy Blue
22046505008	5/16"	27.4	
22046508008	1/2"	40.5	
22046508002	1/2"	40.5	Black

Note: Packing 25 unit

Cat. No.	OD inch	L mm	Colour
22246504003	1/4"	27.5	Grey
22246505003	5/16"	27.5	
22246508003	1/2"	40.5	

Note: Packing 25 unit

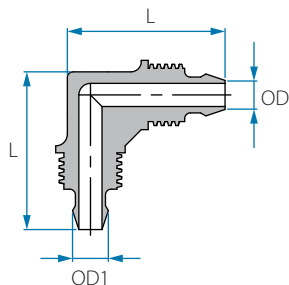

Reducing Elbow

Cat. No.	OD mm	OD1 mm	L mm	Colour
22045748468	8	6	27.3	Blue

Note: Packing 25 unit

FLOW PRODUCTS

Fittings - PVDF

PVDF




Working pressure
Up to 14 BAR
(200 psi) at 20 °C



Temperature
-20 °C - 120 °C
(subject to application)



Fittings' dimensions
refer to tube ID or OD, with respect to
the common application.

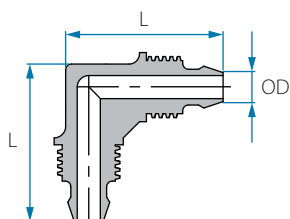


Union Elbow Barb Block Connector

Cat. No.	OD mm	L mm	Colour
22056546001	6	274	○ White
22056548001	8	274	
22056552001	12	405	

Cat. No.	OD inch	L mm	Colour
22256504001	¼"	274	○ White & Navy Blue
22256505001	⅜"	274	
22256508001	½"	405	

Note: Packing 25 unit

* Nuts material is Reinforced PP

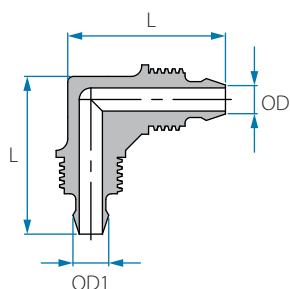

Reducing Elbow Barb Block Connector

Cat. No.	OD mm	OD1 mm	L mm	Colour
22055748461	8	6	273	○ White

Note: Packing 25 unit

* Nuts material is Reinforced PP